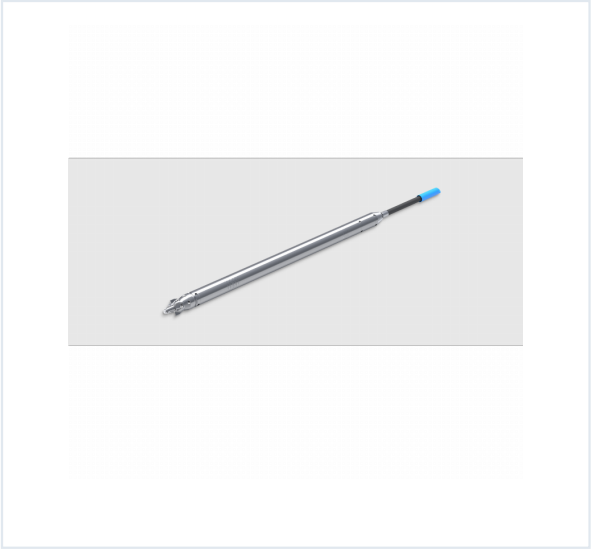


PNEUMATIC PIERCING TOOL

# TRACTO GRUNDOMAT S75 (katalog 2024)

TRACTO Manufacturer: **TRACTO** · Niemcy

| TOOL DIAMETER | LENGTH |
|---|---|
| **75 mm** | **1,295 mm** |
| WEIGHT | AIR CONSUMPTION |
| **28 kg** | **0.8 m³/min** |

## Technical specifications

### BASIC INFORMATION

| | | | |
|---|---|---|---|
| Family | **GRUNDOMAT** | Model | **GRUNDOMAT S75 (katalog 2024)** |
| Version | **krótka** | Generation | **katalog 2024 (sprzed P+)** |

### DIMENSIONS AND WEIGHT

| | | | |
|---|---|---|---|
| Tool diameter | **75 mm** | Length | **1,295 mm** |
| Weight | **28 kg** | Short version | **Yes** |

### PNEUMATIC SUPPLY

| | | | |
|---|---|---|---|
| Air consumption | **0.8 m³/min** | | |

### IMPACT MECHANISM

| | | | |
|---|---|---|---|
| Impact rate – feed control | **490 1/min** | Impact rate – servo control | **460 1/min** |

## HEAD AND DESIGN

| | | | |
|---|---|---|---|
| Head type | **koronowa lub stopniowana (zależnie od konfiguracji)** | Head movement | **ruchoma** |
| Replaceable head | **Yes** | | |

## CONTROL AND REVERSE

| | | | |
|---|---|---|---|
| Reverse | **Yes** | | |

## BORE PARAMETERS

| | | | |
|---|---|---|---|
| Guided operation | **No** | | |

## PIPE INSTALLATION

| | | | |
|---|---|---|---|
| Maximum pipe diameter | **63 mm** | Pipe pulling | **Yes** |
| Supported pipe materials | **PE, PVC** | | |

## APPLICATIONS

| | | | |
|---|---|---|---|
| Primary application | **Przeciski do instalowania przyłączy i przepustów podziemnych** | Pipe installation | **Yes** |

The technical data is for information only and comes from the manufacturer's materials. Confirm the specifications with the manufacturer or distributor before buying or using the device.